



WALL

CLASSIC

COLOR WHEEL™ COLLECTION – GLAZED CERAMIC



 daltile®
IMAGINE WHAT'S POSSIBLE™

CLASSIC

COLOR WHEEL™ COLLECTION – GLAZED CERAMIC

A Spectacular Spectrum

The element of color is visually represented in Color Wheel™. This vibrant collection offers a wide spectrum of colorful selections from bright and pigmented hues to neutral and earthy tones. A favorite of artists and designers, Color Wheel provides the perfect palette to inspire the imagination.

• COLOR SCHEME

- Eighteen rich semi-gloss colorful accents
- Plus, twelve coordinating neutral tones in semi-gloss and matte finishes

• ARTISTIC INSPIRATIONS

- Stylish shapes in classic size options
- With endless design opportunities, this collection is a perfect fit for residential and commercial applications



Cover photo features Color Wheel™ Classic Ocean Blue, Galaxy, & Desert Grey 6 x 6 on the wall with Emerson Wood™ Brazilian Walnut 8 x 48 on the floor. Above photo features Color Wheel™ Classic Artic White & Navy on the walls.

WALL

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™



CG
GLAZED CERAMIC



LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

SPECIAL FEATURES

SIZES:



FINISHES: MATTE | SEMI-GLOSS

SEMI-GLOSS




WHITE 0100 (1) ARCTIC WHITE 0190 (1) BISCUIT K175 (1) ALMOND 0135 (1) URBAN PUTTY 0161 (2) ARCHITECTURAL GRAY 0109 (2)



ELEMENTAL TAN 0166 (2) ARTISAN BROWN 0144 (2) DESERT GRAY X114 (1) SUEDE GRAY 0182 (2) CHALKBOARD 0180 (2) BLACK K111 (2)

MATTE



MATTE ARCTIC WHITE 0790 (1) MATTE BISCUIT K775 (1) MATTE ALMOND X735 (1) MATTE URBAN PUTTY 0761 (2) MATTE ARCHITECTURAL GRAY 0709 (2)



MATTE ELEMENTAL TAN 0766 (2) MATTE ARTISAN BROWN 0744 (2) MATTE DESERT GRAY X714 (1) MATTE SUEDE GRAY 0782 (2) MATTE CHALKBOARD 0780 (2) MATTE BLACK K711 (2)

ACCENT*



CORNSILK 0160 (3) MUSTARD 1012 (3) SUNFLOWER DH50 (3) ORANGE BURST 1097 (3) CURRANT SH17 (3) PLUM CRAZY 1178 (3)



SPA 0148 (3) GARDEN SPOT 0141 (3) KEY LIME 1098 (3) ELECTRIC BLUE 1194 (3) COBALT DM14 (3)† WOOD VIOLET 1467 (3)



WATERFALL 0169 (3) EMERALD 0115 (3) OCEAN BLUE 1049 (3) SEA BREEZE 1174 (3) GALAXY 1469 (3) NAVY K189 (3)

* Accent available in Semi-Gloss finish only. † Subject to crazing; black grout not recommended
(1), (2) and (3) indicate price groups. (1) being the least expensive.



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT*
*Not Applicable to Heat-Resistant Mosaics



SIMPLICLEAN™

CLASSIC

COLOR WHEEL™ COLLECTION – GLAZED CERAMIC

WALL

TRIM

TRIM		Thickness	Pieces/ Carton
S1/212J / 1/2 x 12 Jolly	(1/2" x 11-15/16") (1.29 cm x 30.36 cm)	1/4" 7.23 mm	12
A106 / 1 x 6 Quarter Round	(1" x 6") (2.43 cm x 15.16 cm)	5/16" 7.90 mm	152
AC106 / 1 x 6 Quarter Round Corner	(1" x 6") (2.43 cm x 15.16 cm)	5/16" 7.90 mm	120
SURFACE BULLNOSE			
S4269 / 2 x 6 Bullnose	(2" x 6") (5.15 cm x 15.31 cm)	5/16" 7.90 mm	100
SN4269 / 2 x 2 Bullnose Corner	(2" x 2") (5.15 cm x 5.15 cm)	5/16" 7.90 mm	25
S4669 / 6 x 6 Bullnose	(6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	50
SCRL4669 / 6 x 6 Bullnose Corner	(6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	50
S4449 / 4 x 4 Bullnose	(4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	100
SCRL4449 / 4 x 4 Bullnose Corner	(4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	100
S4369MOD / 3 x 6 Bullnose (on 6" side)	(3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	100
S4639MOD / 3 x 6 Bullnose (on 3" side)	(3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	100
SCR4369M / 3 x 6 Bullnose Corner Right	(3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	100
SCL4369M / 3 x 6 Bullnose Corner Left	(3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	100
RADIUS BULLNOSE			
A4200 / 2 x 6 Bullnose	(2" x 6") (5.28 cm x 15.20 cm)	5/16" 7.90 mm	100
AN4200 / 2 x 2 Bullnose Corner	(2" x 2") (5.28 cm x 5.28 cm)	5/16" 7.90 mm	20
FLAT TOP COVE BASE ^			
A3601 / 6 x 6 Cove Base	(6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	44
SCR3601 / 6 x 6 Cove Corner Right	(6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	20
SCL3601 / 6 x 6 Cove Corner Left	(6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	20
A3401 / 4 x 4 Cove Base	(4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	84
SCR3401 / 4 x 4 Cove Corner Right	(4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	30
SCL3401 / 4 x 4 Cove Corner Left	(4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	30
A3361MOD / 3 x 6 Cove Base	(3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	36
SCR3361M / 3 x 6 Cove Base Corner Right	(3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	36
SCL3361M / 3 x 6 Cove Base Corner Left	(3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	36
SANITARY COVE BASE *			
S3619T / 6 x 6 Cove Base	(6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	40
SCR3619T / 6 x 6 Cove Base Corner Right	(6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	20

TRIM (CON'T)

		Thickness	Pieces/ Carton
SCL3619T / 6 x 6 Cove Base Corner Left	(6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	20
S3419T / 4 x 6 Cove Base	(4-1/4" x 6") (10.90 cm x 15.31 cm)	5/16" 7.90 mm	60
SCR3419T / 4 x 6 Cove Base Corner Right	(4-1/4" x 6") (10.90 cm x 15.29 cm)	5/16" 7.90 mm	20
SCL3419T / 4 x 6 Cove Base Corner Left	(4-1/4" x 6") (10.90 cm x 15.31 cm)	5/16" 7.90 mm	20
SANITARY COVE BASE - Slim Foot Design *			
S3619TN / 6 x 6 Cove Base	(6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	40
SC3619TN / 1 x 6 Cove Base Corner	(1" x 6") (2.43 cm x 15.16 cm)	5/16" 7.90 mm	60





* Available in Group 1 & 2 Colors. Group 3 Colors are Made-to-Order.

^ Available in Group 1 Colors. Group 2 & 3 Colors are Made-to-Order.

TRIM USAGE

Wall Tile	6 x 6	4 x 4	3 x 6	3 x 6 Bevel
Jolly	S1/212J	S1/212J	S1/212J	S1/212J
Quarter Round	A106	A106	A106	A106
Quarter Round Corner	AC106	AC106	AC106	AC106
SURFACE BULLNOSE				
Bullnose	S4669	S4449	S4369MOD & S4639MOD	
Corner	SCRL4669	SCRL4449	SCR4369M & SCL4369M	
Bullnose	S4269	S4269	S4269	
Corner	SN4269	SN4269	SN4269	SN4269
RADIUS BULLNOSE				
Bullnose	A4200	A4200	A4200	
Corner	AN4200	AN4200	AN4200	
FLAT TOP COVE BASE				
Cove Base	A3601	A3401	A3361MOD	A3361MOD
Cove Base Corner	SCR3601 & SCL3601	SCR3401 & SCL3401	SCR3361M & SCL3361M	SCR3361M & SCL3361M
	Best Match			

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	6 x 6 Wall Tile	(6" x 6") (15.31 cm x 15.31 cm)	5/16" 7.90 mm	12.50	50
	4 x 4 Wall Tile	(4-1/4" x 4-1/4") (10.90 cm x 10.90 cm)	5/16" 7.90 mm	12.50	100
	3 x 6 Wall Tile	(3" x 6") (7.65 cm x 15.31 cm)	5/16" 7.90 mm	12.50	100
	3 x 6 † Bevel Wall Tile	(3" x 6") (7.65 cm x 15.31 cm)	3/8" 9.40 mm	10.40	80

† Bevel is available in Group 1 colors only.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓*
Pool Linings	N/A	✓


A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

* Matte finishes only. No Bevel Tile. Darker colors may show scratches.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Wall: 1/16"	 Low (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

LRV & MUNSELL

Color #	LRV Illuminate-OBS: F02-02 (CWF)	Munsell
SEMI-GLOSS		
0100	83.9	2.6Y 9.2/0.5
0190	83.9	7.0Y 9.2/0.2
K175	75.9	5.2Y 8.8/0.9
0135	68.0	2.9Y 8.4/1.2
0161	48.0	1.7Y 7.3/1.5
0166	26.8	1.1Y 5.7/1.6
0144	14.5	5.9YR 4.3/1.3
0109	37.9	6.0Y 6.6/1.0
X114	43.7	1.4GY 7.0/0.3
0182	22.6	1.9B 5.3/0.1
0180	11.4	1.3B 3.9/0.4
K111	5.0	10.0B 2.6/0.1
MATTE		
0790	83.4	4.9Y 9.2/0.2
K775	75.9	5.2Y 8.8/0.9
X735	70.9	3.5Y 8.6/1.2
0761	48.1	2.5Y 7.3/1.5
0766	26.8	0.2Y 5.7/1.7
0744	13.9	7.6YR 4.3/1.3
0709	36.9	5.6Y 6.5/1.0
X714	43.9	3.6GY 7.0/0.4
0782	22.3	9.8G 5.3/0.1
0780	11.1	0.6B 3.9/0.4
K711	5.8	3.3PB 2.8/0.1
ACCENT		
K189	5.9	5.0PB 2.9/1.2
1012	48.1	9.7YR 7.2/6.9
1049	18.0	1.9B 5.0/4.5
1097	26.4	10.1R 5.6/10.2
0115	11.7	3.3G 4.1/4.9
1174	9.1	5.8PB 3.6/5.6
1178	6.8	5.9RP 3.1/2.0
SH17	14.0	5.1R 4.4/11.1
0141	24.7	3.0GY 5.5/2.1
0148	48.3	3.7BG 7.4/1.3
0160	73.3	3.3Y 8.7/3.3
0169	40.4	9.7B 6.9/2.6
1469	9.3	4.5PB 3.6/2.7
DH50	70.6	4.7Y 8.4/8.8
DM14	4.7	9.9PB 2.5/4.4
1098	50.9	2.6GY 7.4/5.2
1194	19.0	0.3PB 5.2/6.7
1467	16.6	7.0P 4.6/2.2

 **POST-CONSUMER RECYCLED MATERIALS**

 **PRE-CONSUMER RECYCLED MATERIALS**

 **MADE IN THE U.S.A.**

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.





MOSAIC

COLOR WHEEL™ MOSAICS
GLAZED CERAMIC



 daltile®
IMAGINE WHAT'S POSSIBLE™

COLOR WHEEL™ MOSAICS

GLAZED CERAMIC

A Spectacular Spectrum

The element of color is visually represented in Color Wheel™. This vibrant collection offers a wide spectrum of colorful selections from bright and pigmented hues to neutral and earthy tones. A favorite of artists and designers, Color Wheel provides the perfect palette to inspire the imagination.

- COLOR SCHEME
 - Eight rich semi-gloss colorful accents
 - Plus, eight coordinating neutral tones in semi-gloss and matte finishes
- ARTISTIC INSPIRATIONS
 - Stylish shapes from unique linear sizes to exciting mosaic designs
 - With endless design opportunities, this collection is a perfect fit for residential and commercial applications



Cover photo features Color Wheel™ Mosaics Matte Arctic White 1 x 6 mosaic on the wall, Ocean Blue & Matte Arctic White 1.5" Hexagon mosaic on the right wall, Matte Arctic White Penny Round mosaic on the shower floor and Gamma™ Hypnotic 12 x 24 matte on the floor.

Above photo features Color Wheel™ Mosaics Mustard, Orange Burst, Currant & Arctic White Penny Round mosaics on the fountain and Keystones™ Matte Arctic White 2 x 2 mosaic in the pool.

MOSAIC

USAGE



SPECIAL FEATURES

SEE CHARTS FOR FULL PRODUCT DETAILS

SIZES:



FINISHES: SEMI-GLOSS | MATTE

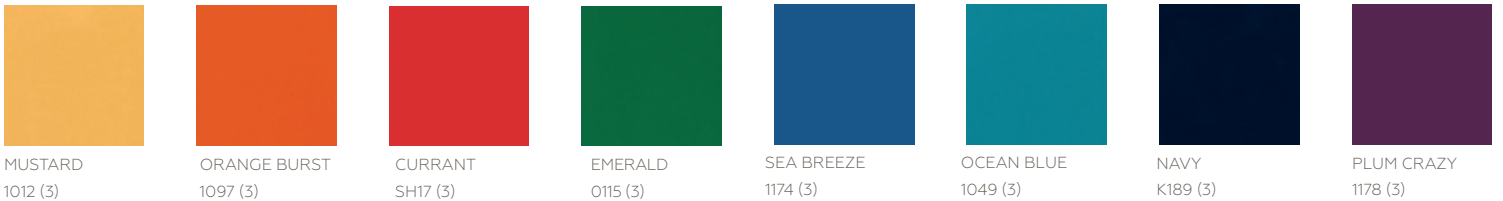
SEMI-GLOSS




MATTE



ACCENT+



SIZES

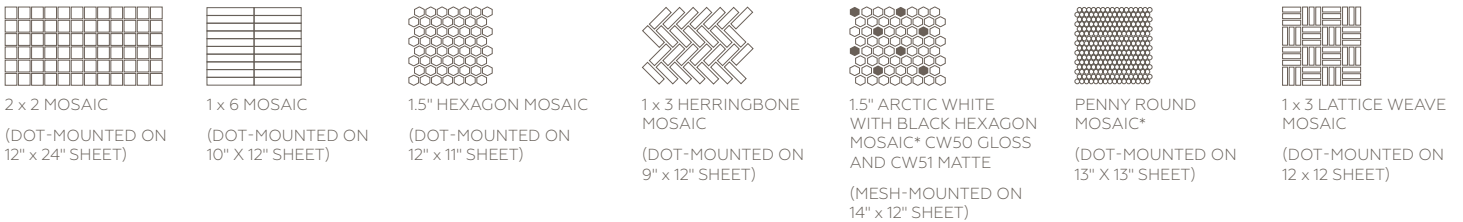

+ Accent available in Semi-Gloss finish only.

(1), (2) and (3) indicate price groups. (1) being the least expensive.

Shapes stocked in all colors. Blends and patterns are also available on a made to order basis.

* Stocked in all colors and patterns (CW50 Gloss and CW51 Matte).

Other pattern and blend options available (in any size, color or finish) on a made to order basis.



SLIP RESISTANT



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*
*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT*
*Not Applicable to Mesh-Mounted Mosaics



CLIMATEPRO™










SIMPLICLEAN™

COLOR WHEEL™ MOSAICS

GLAZED CERAMIC

MOSAIC

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	2 x 2 Mosaic (Dot-mounted on 12" x 24" Sheet)	(12" x 24" Sheet) (30.48 cm x 60.96 cm Sheet)	1/4" (6 mm)	24.00	12
	1 x 6 Mosaic (Dot-mounted)	(9-3/4" x 11-1/2" Sheet) (24.76 cm x 29.21 cm Sheet)	5/16" (8 mm)	8.30	10
	1.5" Hexagon Mosaic (Dot-mounted on 12" x 11" Sheet)	(11-5/8" x 10-1/4" Sheet) (28.89 cm x 26.04 cm Sheet)	1/4" (6 mm)	9.72	12
	1.5" White & Black Hexagon Mosaic (Mesh-mounted on 14" x 12" Sheet)	(14" x 11-1/2" Sheet) (35.56 cm x 29.21 cm Sheet)	1/4" (6 mm)	10.00	10
	1 x 3 Herringbone Mosaic (Dot-mounted)	(9" x 12" Sheet) (22.86 cm x 30.48 cm Sheet)	1/4" (6 mm)	6.00	10
	3/4" Penny Round Mosaic (Dot-mounted)	(11-3/8" x 13-3/8" Sheet) (28.89 cm x 33.97 cm Sheet)	1/4" (6 mm)	10.60	10
	1 x 3 Lattice Weave Mosaic (Dot-mounted)	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4" (6 mm)	10.00	10


* Stocked in Arctic White with Black (both CW50 gloss and CW51 matte).
Other pattern options available on a made to order basis.

♦ Penny Round mosaics are stocked in all colors and in
CW50 Gloss & CW51 Matte Arctic White with Black patterns.

LRV & MUNSELL


Color #	LRV Illuminate-OBS: F02-02 (CWF)	Munsell
SEMI-GLOSS		
0190	83.9	7.0Y 9.2/0.2
K175	75.9	5.2Y 8.8/0.9
0161	48.0	1.7Y 7.3/1.5
0109	37.9	6.0Y 6.6/1.0
X114	43.7	1.4GY 7.0/0.3
0182	22.6	1.9B 5.3/0.1
0180	11.4	1.3B 3.9/0.4
K111	5.0	10.0B 2.6/0.1
MATTE		
0790	83.4	4.9Y 9.2/0.2
K775	75.9	5.2Y 8.8/0.9
0761	48.1	2.5Y 7.3/1.5
0709	36.9	5.6Y 6.5/1.0
X714	43.9	3.6GY 7.0/0.4
0782	22.3	9.8G 5.3/0.1
0780	11.1	0.6B 3.9/0.4
K711	5.8	3.3PB 2.8/0.1
ACCENT		
K189	5.9	5.0PB 2.9/1.2
1012	48.1	9.7YR 7.2/6.9
1049	18.0	1.9B 5.0/4.5
1097	26.4	10.1R 5.6/10.2
0115	12.4	3.4G 4.2/4.6
1174	9.1	5.8PB 3.6/5.6
1178	6.8	5.9RP 3.1/2.0
SH17	14.0	5.1R 4.4/11.1

TRIM

Type	Number	Size	Pieces/ Carton
 12" Jolly	S-1/212J	1/2 x 11-15/16	12

Jolly suitable for wall applications only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Mosaic: 1/8"	 Low (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Gloss Result	Matte Result
Water Absorption	C373	< 3.0%	< 3.0%
Breaking Strength	C648	> 250 lbs	> 250 lbs
Scratch Hardness	MOHS	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at:
daltille.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products,
tile and trim supplied for your particular installation may not match
samples. Final confirmation should be made from actual tiles and
trim prior to installation. Manufactured in accordance with ANSI A137.1
standards.

Not for use on ramps. Water, oil, grease, improper drainage and
certain footwear can create slippery conditions. Floor applications
expected to be exposed to these conditions require extra caution in
product selection.

For additional information refer to "Factors to Consider" at:
daltille.com/Factors.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓*
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Commercial)	≥ 0.42	✓*
Exterior Floor Applications, including Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓**
Pool Linings	N/A	✓

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

* Matte Mosaics Only

† Darker colors may show scratches

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial
2 All Residential Areas	④ All Residential / Commercial

Note: Matte colors only.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.